

Check valve integrated with Super 300 Type Pillar Fitting™



■ Features

■ Excellent chemical resistance

The valve body is made of PFA, enabling this product to cope with various types of liquid chemicals.


■ Smooth opening/closing movement

The opening pressure is as low as 0.01 MPa, allowing fluid to flow smoothly.


Specifications

- ▶ Maximum operating temperature:
O-ring material Kalrez® 150°C
O-ring material EPDM 100°C
- ▶ Maximum operating pressure: 0.7 MPaG
- ▶ Opening pressure: 0.01 MPaG
- ▶ Sealing pressure: 0.05 MPaG
- ▶ Applicable fluid: Liquid
- ▶ Ambient temperature range: 0 to 60°C

■ Operating range

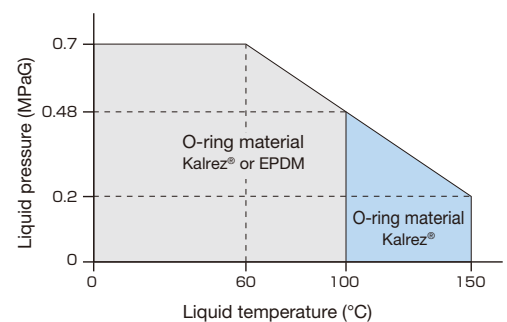

Cross-sectional structural drawing

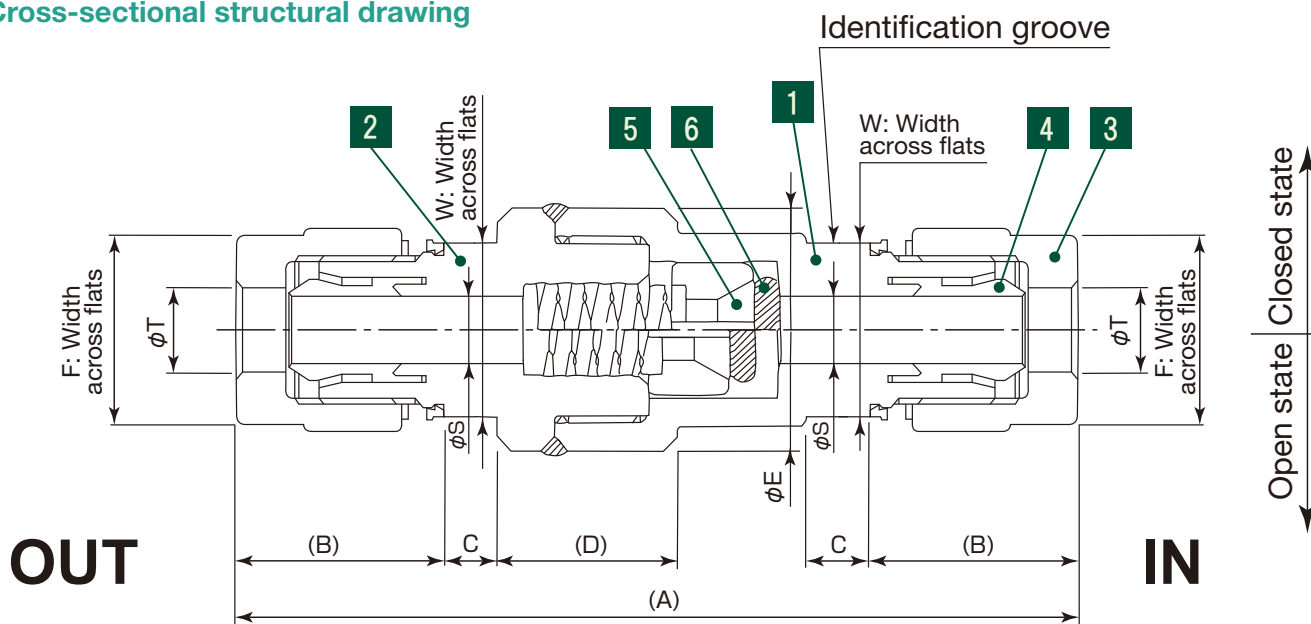

Main parts list

No.	Part name	Material
1	Body 1	P F A
2	Body 2	P F A
3	Union nut	P F A
4	Sleeve	P F A
5	Check assembly	P F A
6	O-ring	Kalrez® or EPDM

Size table

Unit: mm

mm-based tube									
Product No.	Tube size ϕ_T (O.D×I.D)	(A)	(B)	C	(D)	ϕ_E	F	W	Orifice diameter ϕ_S
PGB P4-4B-*	4 × 3	77	14.7	7	20	26	12	12	3.1
PGB P6-6B-*	6 × 4	85.5	19	7	20	26	16	15	4
PGB P8-8B-*	8 × 6	91.5	22	7	20	26	19	18	6
Inch-based tube									
Product No.	Tube size ϕ_T (O.D×I.D)	(A)	(B)	C	(D)	ϕ_E	F	W	Orifice diameter ϕ_S
PGB PW2-W2B-*	6.35 × 3.95	85.5	19	7	20	26	16	15	4

*" in each product No. indicates one of the O-ring material symbols shown below.

O-ring material symbol	Material	Valve body 1 identification groove
K	Kalrez®	Nonexistent
E	EPDM	Present

Note: The fitting cross-sectional structure of PGB P4-4B-* differs from the one shown in the figure above.

PILLAR NIPPON PILLAR PACKING CO., LTD.

Head office/Sales Headquarters
7-1, Shinmachi 1-chome, Nishi-ku, Osaka 550-0013, Japan
Phone: +81-6-7166-8326 Fax: +81-6-7166-8514

Email : sales@pillar.co.jp

<https://www3.pillar.co.jp/en/product/>



Safety precaution

● When using this product, please use correctly and pay sufficient attention to safety.

* Please understand that this catalog may change without prior notice.
* The values shown on this catalog are reference values, not guaranteed values.